



# 12FGH23slim

## 12Volt 5Ah

### Specifications

Nominal Voltage(V) **12V**

#### Nominal Capacity

63.3W@5minute-rate to 1.6V per cell

5 hour rate	(0.85A	to	10.20V)	4.25Ah
1 C	(5A	to	9.60V)	3.17Ah
3 C	(15A	to	9.60V)	2Ah

Weight **Approx. 2.05kg(4.51Lbs.)**

Internal Resistance (at 1KHz) **Approx. 16 mΩ**

#### Maximum Discharge Current for

5 seconds: **75A**

#### Charging Methods at 25 (77 )

Cycle use:

Charging Voltage **14.4 to 15.0V**

Coefficient -5.0mv/ /cell

Maximum Charging Current : **1.5A**

Standby use:

Float Charging Voltage **13.50 to 13.80V**

Coefficient -3.0mv/ /cell

#### Operating Temperature Range

Charge **-15 (5 ) to 40 (104 )**

Discharge **-15 (5 ) to 50 (122 )**

Storage **-15 (5 ) to 40 (104 )**

#### Charge Retention (shelf life) at 20 (68 )

1 month **92%**

3 month **90%**

6 month **80%**

Case Material **ABS**


(UL94 HB flame retardant )

Terminal **F2 (Faston Tab 250)**




### Dimensions

mm(inch)



F2  
(FASTON TAB NO. 250)

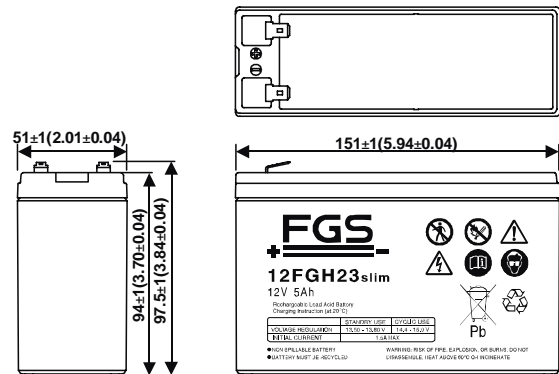

(V) FOR 12V BATTERY  
Discharge Time VS. Discharge Current (25 )

