



FG10451

6Volt 4.5Ah

Specifications

Nominal Voltage(V) **6V**

Nominal Capacity

20 hour rate	(0.225A to	5.25V)	4.5Ah
10 hour rate	(0.428A to	5.25V)	4.275Ah
5 hour rate	(0.765A to	5.1V)	3.825Ah
1 C	(4.5A to	4.8V)	2.55Ah
3 C	(13.5A to	4.8V)	1.8Ah

Weight **Approx. 910g(2.0Lbs.)**

Internal Resistance (at 1KHz) **Approx. 18 mΩ**

Maximum Discharge Current for
5 seconds: **67.5A**

Charging Methods at 25 (77)

Cycle use:

Charging Voltage **7.20 to 7.50V**

Coefficient -5.0mv/ /cell

Maximum Charging Current : **1.35A**

Standby use:

Float Charging Voltage **6.75 to 6.90V**

Coefficient -3.0mv/ /cell

Operating Temperature Range

Charge **-15 (5) to 40 (104)**

Discharge **-15 (5) to 50 (122)**

Storage **-15 (5) to 40 (104)**

Charge Retention (shelf life) at 20 (68)

1 month **92%**

3 month **90%**

6 month **80%**

Case Material **ABS**


(UL94 HB flame retardant)

Terminal **F1 (Faston Tab 187)**



Dimensions

mm(inch)

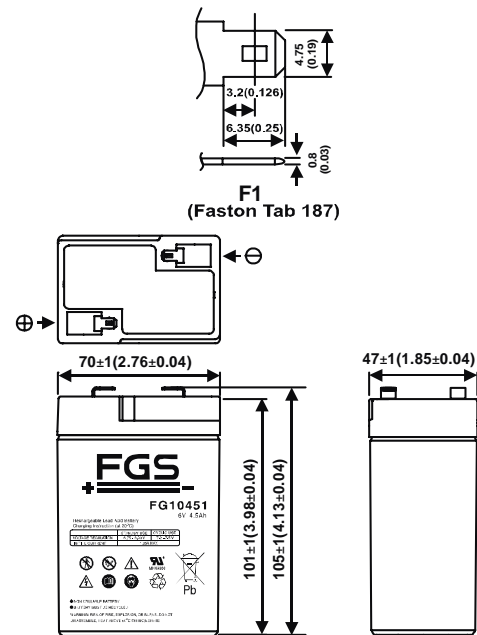

(v) FOR 6V BATTERY Discharge Time VS. Discharge Current (25)

